



QL Gironde

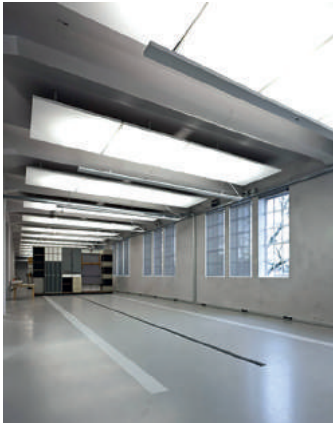

Slank indirect pendel armatuur met hoog rendement LED technologie (>160lm/w). Voorzien van 90 graden lens techniek met 93% efficiency. Vervaardigd uit witgelakt (RAL 9003) geëxtrudeerd aluminium. Verblindingsvrij (UGR <10). Zeer goed toepasbaar in kantoren, klaslokalen, en andere werkkruimtes waar de hoogste eisen aan comfort worden gesteld. Voor optimaal rendement dient de Gironde minimaal 30cm onder een helder wit plafond gehangen te worden. Voorzien van 1 meter staalkabel en 2 meter transparant snoer.

Met optioneel ingebouwde sensor functioneert de Gironde volledig autonoom en reageert het op intredend daglicht en beweging. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80). Kleur stabiliteit, Mac Adam <3. Garantie 5 jaar.


Slim pendant luminaire with high efficiency LED technology (>160lm/w). Fitted with 90 degree lenses (>93% efficiency). Housing made of white painted (RAL 9003) extruded aluminium.

Glare free (UGR <10). Very suitable for offices, classrooms and other working areas where there the highest demands for comfortable light are set. The Gironde needs to be mounted at 30cm minimum distance from a bright white ceiling for optimal performance. Delivered including 1 meter steel cable and 2 meter transparent power cord. With optional build in sensor the luminaire will autonomously react to daylight and motion. Low maintenance and long life expectancy (50.000 hours L80). Color stability, Mac Adam <3. Warranty 5 years.

Vermogen Power	Kleur Colour	Lumen Lumen	CRI (Ra) CRI (Ra)	Lengte (mm) Length (mm)	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikel nummer Article no.	Dali	Dali + Actilume sensor Dali + Actilume sensor
40w	3000k	7.100	>80	1750	6	1	MI04023030	MI04023031	MI04023032
73w	3000k	10.800	>80	1750	6	1	MI07323030	MI07323031	MI07323032
80w	3000k	14.200	>80	3450	12	1	MI08023030	MI08023031	MI08023032
126w	3000k	19.300	>80	3450	12	1	MI12623030	MI12623031	MI12623032
40w	4000k	7.200	>80	1750	6	1	MI04023040	MI04023041	MI04023042
73w	4000k	11.000	>80	1750	6	1	MI07323040	MI07323041	MI07323042
80w	4000k	14.400	>80	3450	12	1	MI08023040	MI08023041	MI08023042
126w	4000k	20.000	>80	3450	12	1	MI12623040	MI12623041	MI12623042

Opties:
1-10V dimbaar

Optional:
1-10V dimmable

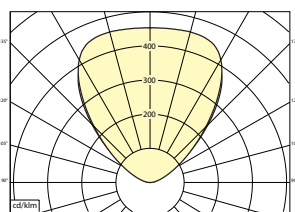

MI04023040
40w 4000k 7.200lm
ηLB 93,4%

